


## E'GRID 3030

Rigid biaxial geogrid

E'GRID Biaxial geogrids from Wrekin can solve pavement problems by providing omni-axial reinforcement to granular sub-bases, capping layers & railway ballasts in areas of weak or variable soils.

When granular particles are compacted over these grids, they partially penetrate and project through the apertures to create a strong and positive interlock. The load dispersal effect from the interlocking mechanism increases shearing resistance within the soil, improving compaction and *allowing the sub base thickness to be decreased*, ultimately reducing construction time and costs.


Product		E'GRID 3030	
Roll size (m) <sup>note 5</sup>		4 x 50	
Tensile strength (kN/m <sup>2</sup> ) <sup>note 1</sup>	MD	30	
	TD	30	
Tensile load (kN/m)	2% strain	MD	11.0
		TD	11.0
	5% strain	MD	21.6
		TD	21.6
Junction efficiency (%) <sup>note 2</sup>		>95	
Radial stiffness (kN/m) <sup>note 3</sup>		550	
Pitch size (mm)	Pmd	40	
	Ptd	40	
Rib width (mm)	Wmd	2.2	
	Wtd	2.7	
Rib depth (mm)	Tmd	2.4	
	Ttd	1.8	
Tj (mm)		4.0	

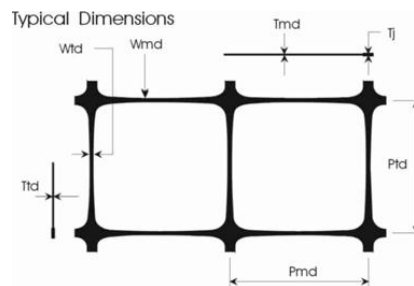

**Notes:**

- All strength and load figures are based on test results from the manufacturer's laboratory, measured in accordance with ISO 10319 at the temperature of 21±1°C and calculated as a lower 95% confidence limit in accordance with ISO 2602
- Measured by comparing the results of tests in accordance with test methods GRI/GG2 and GRI/GG1
- At 2% strain under 360° radial loading  
Determined from tests in accordance with EN ISO 10319.
- Carbon Black content ≥2%
- Other roll sizes are available to order

Other grades of geogrids are available from Wrekin including SX GRID



- Wrekin Products Ltd reserves the right to alter product specifications without prior notice.
- It is the responsibility of all users to satisfy themselves that the above data is current.
- The above figures are average values obtained in testing to current EN geotextiles test standards. Although not guaranteed these results do, to the best of our knowledge, offer a true and accurate record of the product's performance.
- Wrekin cannot be held responsible for the performance of these products as conditions of use are beyond our control.
- Installation details are available on request.