


Tri-Star

Ductile iron D400 access covers

The Tristar range of D400 Ductile Iron access covers fully comply with BS EN 124:1994 and carry the British Standard Kitemark. Tristar also possesses some innovative design features that mark it out from the competition.



Illustrated:
DMT0D4/6060/KT

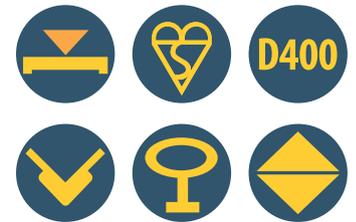


-  For use in a Group 4 Class D400 environment
-  All fully comply with BS EN 124:1994 and are Kitemarked by BSI
-  A patented safety keyway prevents accidental disengagement during the lifting operation. Also compatible with standard D400 lifting keys.
-  Patented frame design with enlarged frame corners that help dissipate load
-  Manufactured from strong and highly durable ductile iron
-  Three point suspension on covers for non-rock stability

Range details

Wrekin product code	Clear opening size (Cx D mm)	Frame depth (mm)	Over frame size (Ax B mm)
DMT0D4/4545/KT	450 x 450	100	570 x 570
DMT0D4/6045/KT	600 x 450	100	740 x 590
DMT0D4/6060/KT	600 x 600	100	720 x 720
DMT0D6/6060/KT	600 x 600	150	720 x 720
DMT0D4/6767/KT	675 x 675	100	800 x 800
DMT0D6/6767/KT	675 x 675	150	800 x 800
DMT0D4/7575/KE	750 x 750	100	940 x 940

Available options: SW or FW integrally badged (other badging available on request)
Ventilation holes, locked covers, sealing plates and safety grilles.

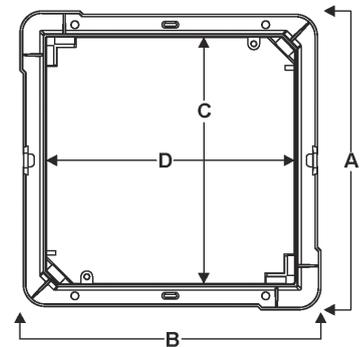

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves that the above data is current.
3. Wrekin cannot be held responsible for the performance of these products as conditions of use are beyond our control.
4. Installation details are available on request.